



多楔带轮输送辊筒 Multi-Wedge Pulley Conveyor Roller

2450系列 2450 Series

产品特点

1. “O”带传动所不能克服的负载能力相对薄弱的问题，在2450系列的多楔带轮辊筒中得到了很好的解决与处理，同时兼具“O”带传动固有的高速、静音等特点。
2. PJ型多楔带，间距2.34mm，共9个沟槽。
3. 根据输送负载的大小，可以选择2道或3沟道的多楔带，即使选用2沟道的多楔带，单元输送负载也可达50kg。
4. 多楔带轮与筒体配合，使得驱动和输送区域在空间上分开，避免输送物表面有油时对多楔带的影响。
5. 不同的辊筒间距匹配不同的多楔带型号。
6. 精密滚珠轴承和塑胶轴承座、端盖的设计组成了关键的轴承组件部分，它不仅美观，更重要的是使得筒体运行得更安静。
7. 辊筒末端的端盖，有效地防止了工作环境中灰尘和溅水的进入。
8. 适合高速输送，根据辊筒直径和长度不同，速度会有差异。

Multi-Wedge Pulley Conveyor Roller 2450

Product Features.


1. "O" belt drive can not overcome the relatively weak load capacity of the problem, in the 2450 series of multiple chiseled belt wheel roller simple to get a good solution and deal with, and at the same time both "O" belt drive inherent high speed, quiet and other characteristics.
2. PJ type multi-fretted belt, pitch 2.34mm, a total of nine grooves.
3. According to the size of the conveying load, you can choose 2 or 3 grooves of the wedge belt, even if you choose 2 grooves of the wedge belt, the unit conveying load can be up to 50kg.
4. The spatial separation of the drive and conveyor areas due to the fit of the sprag pulleys to the cylinder body avoids the influence of oil on the conveyor belt when it is on the surface of the conveyed material.
5. Different roller spacing matches different types of sprag belts.
6. Precision ball bearings and plastic housings and end caps are designed to form the key bearing assembly part, which is not only aesthetically pleasing, but more importantly, makes the cylinder run more quietly.
7. The end cover at the end of the roller effectively prevents the entry of dust and splashing water in the working environment.
8. Suitable for high speed conveying, the speed will be different according to the roller diameter and length.

2450系列 (弹性轴) 2450 Series (Flexible Shaft)



2450系列(弹性轴)			
管径系列	轴直径		
50	S11/12		
管材(表面处理)	管径与壁厚	轴直径	
		S11	12
钢制, 镀锌(抛光镀锌)	50x1.5	5015-S11-T	5015-12-T
	50x2.0	5020-S11-T	5020-12-T
钢管, 镀锌(套PVC软胶)	50x1.5	5015-S11-T	5015-12-T
	50x2.0	5020-S11-T	5020-12-T
不锈钢(304)	50x1.5	5015-S11-T	5015-12-T

2450系列 (内螺纹) 2450 Series (female thread)

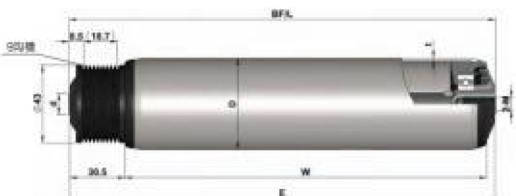

2450系列(内螺纹)			
管径系列	轴直径		
50	12/15		
管材(表面处理)	管径与壁厚	轴直径	
		12(M8x15)	15(M10x20)
钢制, 镀锌(抛光镀锌)	50x1.5	5015-12-M	5015-15-M
	50x2.0	5020-12-M	5020-15-M
钢管, 镀锌(套PVC软胶)	50x1.5	5015-12-M	5015-15-M
	50x2.0	5020-12-M	5020-15-M
不锈钢(304)	50x1.5	5015-12-M	5015-15-M